

BUNN®

12 Cup CDBC Automatic Coffee Brewer

ITEM#

PROJECT

DATE



Model CDBC

(2 top warmers)
(decanters sold separately)

Dimensions: 18.9" H x 8.5" W x 17.8" D
(48cm H x 21.6cm W x 45.2cm D)

Features

Automatic CDBC Coffee Brewers

- Large 200 oz. (5.9 liter) tank provides back-to-back brewing capacity.
- Adjusts automatically to varying water pressure.
- Quicker install saves up to 30 minutes. Pot level, cold brew lock-out and tank temperature set easily from advanced touch pad on front of machine.
- Electronic diagnostics and built in tank drain make service easier.
- Ensures coffee brew quality with cold brew lock out capability.
- SplashGard® funnel deflects hot liquids away from the hand.
- Coffee extraction controlled with pre-infusion or Pulse Brew™ and digital temperature control.
- Automatic warmer shut-off.



Model CDBC

(3 lower warmers)

(decanters sold separately)

Dimensions: 17" H x 16.5" W x 17.7" D
(43.2cm H x 41.9cm W x 45cm D)

For current specification sheets and other information, go to www.bunn.com.

Related Products

Easy Clear® EQ-17-TL

Product No. : 30200.1000

Dimensions:

12⁷/₁₆" H x 2¹/₂" W x 3" D
31.6 cm H x 6.35 cm W x 7.62 cm D



Paper Filter Pack

Product No. : 20115.0000

Packed per case: 1,000

Dimensions: 4¹/₄" Base x 2³/₄" Sidewall
10.8 cm Base x 6.98 cm Sidewall



1GPR SS Portable Server on an RWS1 Warmer

1GPR Product No. : 12487.0001*

RWS1 Product No. : 12203.0010

*Also available with side handles or black decor.



Easy Clear® ED-17-TL

Product No. : 30201.1001

Dimensions: 8¹/₄" H x 2⁵/₁₆" Dia.
20.95 cm H x 5.87 cm Dia.

Easy Pour® black decanter

Product No. : 06100.0101

Quantity: 1 (also packaged in quantities of 2, 3, 6, 12, & 24)



RWS1A Product No. : 12203.0011 (230V)

Easy Pour® orange decanter (for decaf)

Product No. : 06101.0101

Quantity: 1 (also packaged in quantities of 2, 3, 6, 12, & 24)

Model	Agency Listing	International Model	Agency Listing
CDBC15 (2 top)	UL NSF	No International model	
CDBC15 (3 lower)	UL NSF		
CDBC35 (3 lower)	UL NSF		
CDBC35 (3 lower left)	UL NSF		
CDBC35 (3 lower right)	UL NSF		

Patents Apply

5/04

A1.4

Dimensions & Specifications

Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Brewing Capacity	Cu. Ft.	Shipping Weight	Cord Attached
CDBCF15 (3 lower)	28800.0100	120	15	1425	1800	4.5 gal./hr.	6.4	31 lbs. (14.1 kg)	Yes
CDBCF15 (2 top)	28800.0101	120	15	1425	1800	4.5 gal./hr.	3.9	30 lbs. (13.6 kg)	Yes
CDBCF35 (3 lower)* ^b	28800.0113	120/240	17.5	3500	3850	7.5 gal./hr.	6.4	32 lbs. (14.6 kg)	No
CDBC35 (2 top)	28800.0107	120/240	17.5	3500	3850	7.5 gal./hr.	4.0	27.8 lbs. (12.6 kg)	No
CDBC35 (3 lower)* ^{tb}	28800.0114	120/240	17.5	3500	3850	7.5 gal./hr.	6.4	32 lbs. (14.6 kg)	No
CDBCF35 (2 top) ^b	28800.0115	120/240	17.5	3500	3850	7.5 gal./hr.	4.0	29.5 lbs. (13.4 kg)	No

*Models have a stainless steel funnel. ^tModel has lower warmers on the left side of brewer and has no hot water faucet. ^bModel has black decor.


Brewing capacity: based upon incoming water temp of 60°F (140°F rise) per 1/2 gallon brew time of 4 minutes.

Electrical: 120 volt, 15 amp. models require 2-wires plus ground service rated 120V, single phase, 60 Hz.

120/240 volt models require 3-wires plus ground service rated 120/240V, single phase, 60 Hz.

An internal terminal block is configured for connection to a 3-wire plus ground.

Plumbing: 20-90 psi (138-621 kPa). Machines supplied with 1/4" male flare fitting. Twin models supplied with 3/8" male flare fitting.

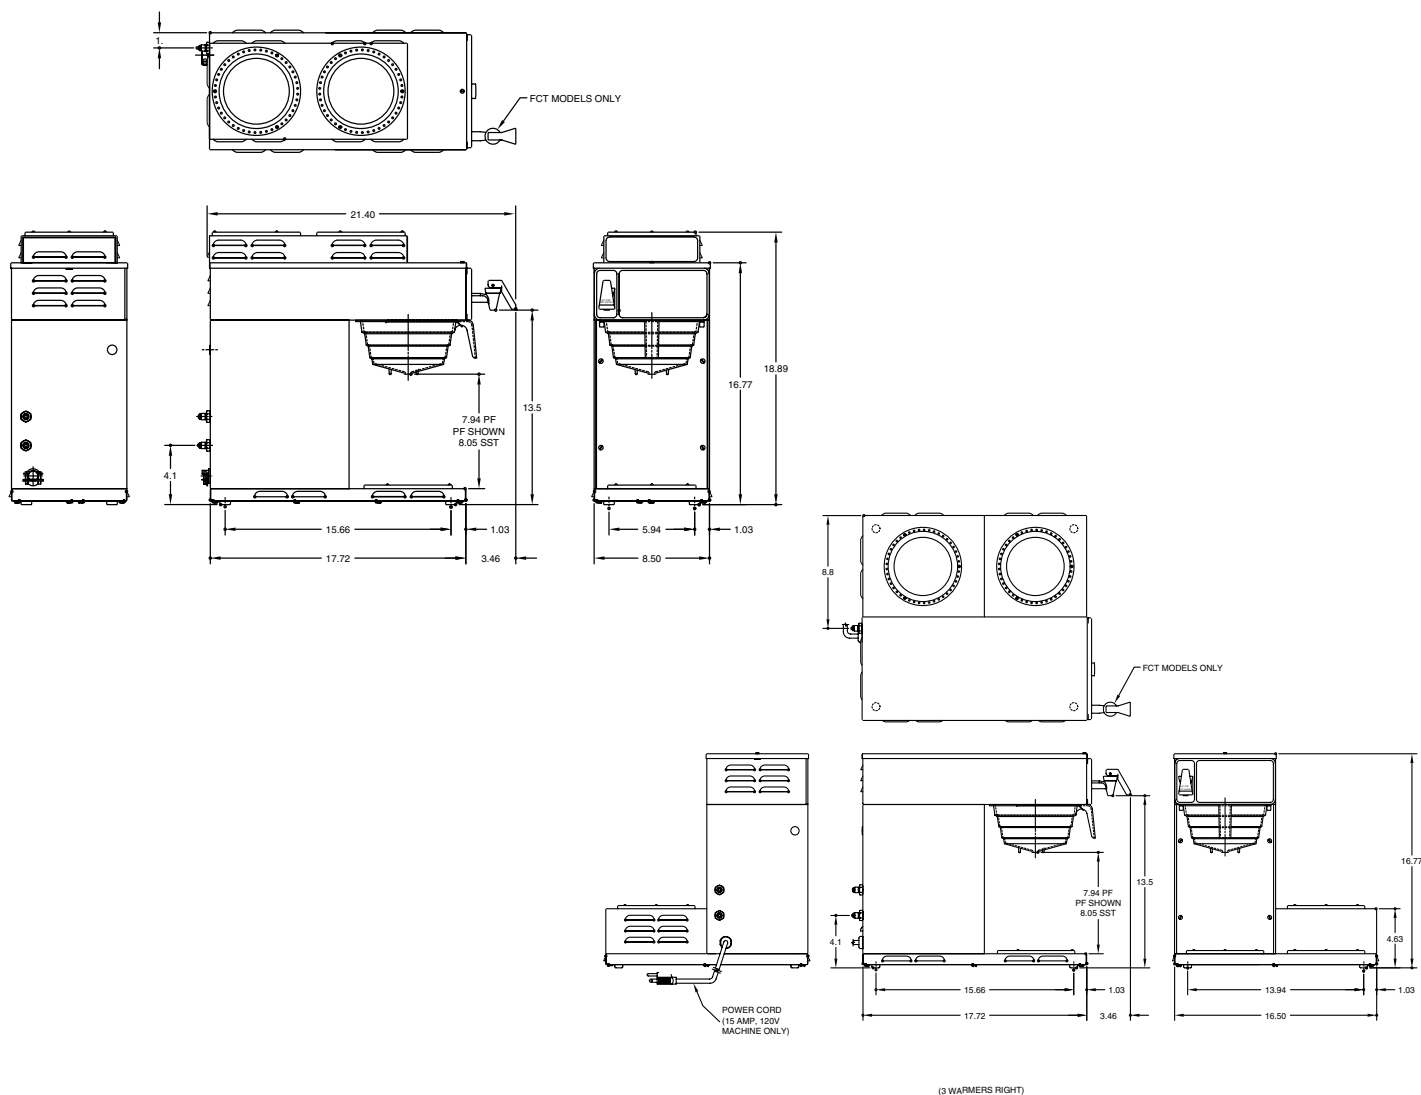

BUNN Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.