

## 12 Cup CDBCF Dual-Voltage Coffee Brewers



### Model CDBCF-DV

(2 top warmers)

(decanters sold separately)

Dimensions: 18.9" H x 8.5" W x 17.8" D  
(48cm H x 21.6cm W x 45.2cm D)

### Features

#### Automatic CDBC Coffee Brewers

- Large 200 oz. (5.9 liter) tank provides back-to-back brewing capacity.
- Dual voltage adaptable. Can operate at 120V/15 amp. or 120/208-240V.
- Digital temperature control and accuracy.
- Quicker install saves up to 30 minutes. Pot level, cold brew lock-out and tank temperature set easily from advanced touch pad on front of machine.
- Electronic diagnostics and built in tank drain make service easier.
- SplashGard® funnel deflects hot liquids away from the hand.
- Coffee extraction controlled with programmable pre-infusion or Pulse Brew™.
- Automatic warmer shut-off.

For current specification sheets and other information, go to [www.bunn.com](http://www.bunn.com).

### Related Products

#### Easy Clear® EQ-17-TL

Product No. : 30200.1000

Dimensions:

12<sup>7</sup>/<sub>16</sub>" H x 2<sup>1</sup>/<sub>2</sub>" W x 3" D  
31.6 cm H x 6.35 cm W x 7.62 cm D



#### Paper Filter Pack

Product No. : 20115.6000

Packed per case: 1,000

Dimensions: 4<sup>1</sup>/<sub>4</sub>" Base x 2<sup>3</sup>/<sub>4</sub>" Sidewall  
10.8 cm Base x 6.98 cm Sidewall



#### WX1-warmer

Product No. : 06450.6000

One position warmer



#### Easy Clear® ED-17-TL

Product No. : 30201.1001

Dimensions: 8<sup>1</sup>/<sub>4</sub>" H x 2<sup>5</sup>/<sub>16</sub>" Dia.

20.95 cm H x 5.87 cm Dia.



#### Easy Pour® black decanter

Product No. : 06100.0201

Quantity: 1 (also packaged in quantities of 3 & 24)



#### WX2-warmer

Product No. : 06310.6000

Two position warmer



#### Easy Pour® orange decanter (for decaf)

Product No. : 06101.0201

Quantity: 1 (also packaged in quantities of 3 & 24)



| Model    | Agency Listing |
|----------|----------------|
| CDBCF-DV |                |

## Dimensions & Specifications

CANADA 


| Model               | Product #   | Volts   | Amps | Tank Htr Watts | Total Watts | Capacity per hour  | Cubic ft <sup>3</sup> /m <sup>3</sup> | Weight lbs/kg | Cord Attached |
|---------------------|-------------|---------|------|----------------|-------------|--------------------|---------------------------------------|---------------|---------------|
| CDBCF-DV<br>(2 top) | 28800.6023* | 120     | 12.5 | 1150           | 1500        | 3.8 gal/14.4 liter | 3.7 / .10                             | 35 / 15.9     | No            |
|                     |             | 120/208 | 12.3 | 2215           | 2565        | 6.5 gal/24.6 liter | 3.7 / .10                             | 35 / 15.9     | No            |
|                     |             | 120/240 | 15.2 | 2950           | 3300        | 7.0 gal/26.5 liter | 3.7 / .10                             | 35 / 15.9     | No            |

\*Model has a black plastic funnel.

Brewing capacity: based upon incoming water temp of 60°F (140°F rise) per 1/2 gallon brew time of 4 minutes.

Electrical: 120 volt, 15 amp. models require 2-wires plus ground service rated 120V, single phase, 60 Hz. An internal terminal block is configured for connection to a 3-wire plus ground.

Plumbing: 20-90 psi (138-621 kPa). Machines supplied with 1/4" male flare fitting. Twin models supplied with 3/8" male flare fitting.

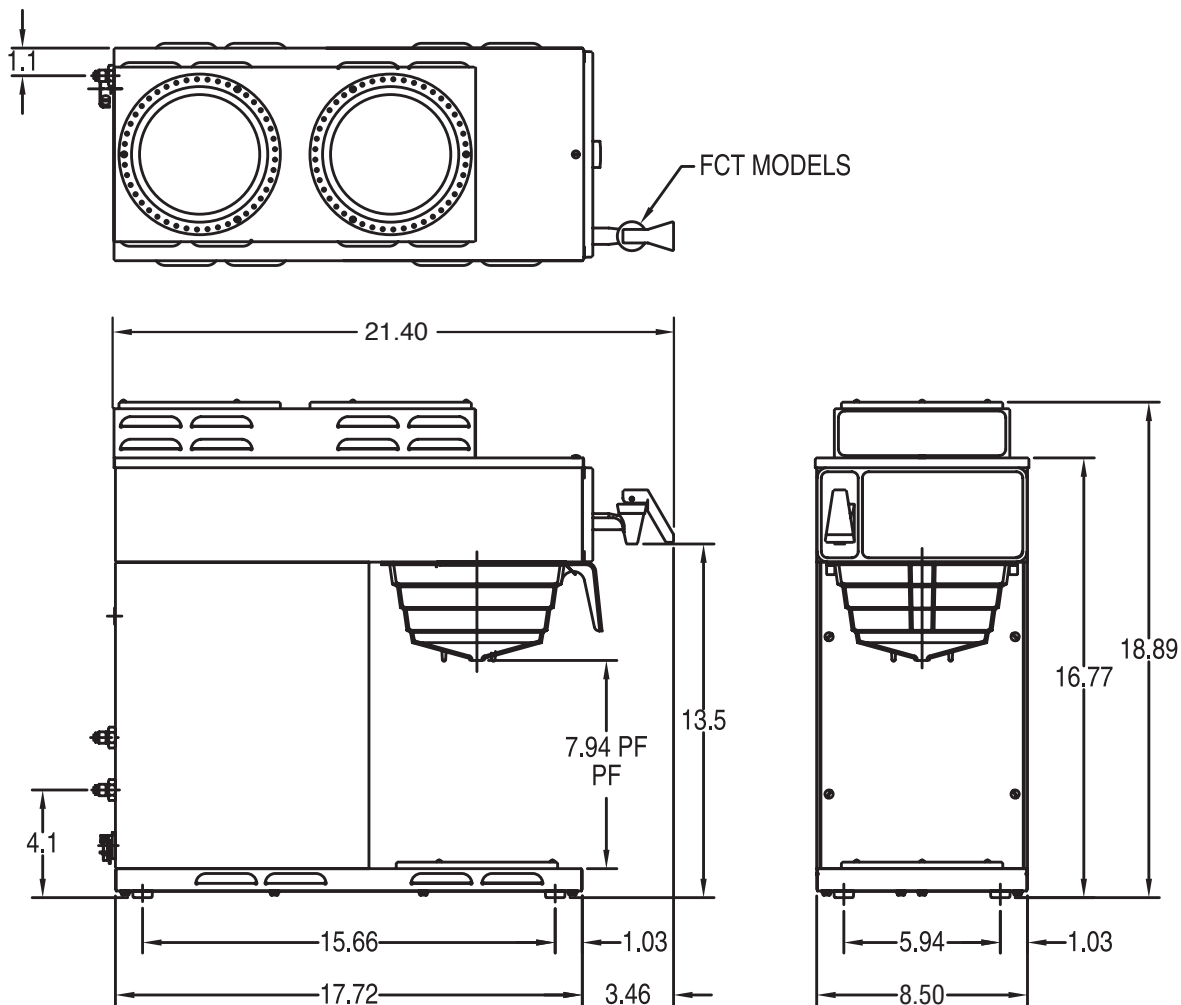

Bunn-O-Matic Corporation of Canada - 280 Industrial Pkwy. S. Aurora, Ontario L4G 3T9 • 905-841-2866 • Fax 905-841-2775 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.